


Features

- **Intrinsically Safe** – Built to comply with requirements for Class 1, Division 1, Groups A, B, C and D hazardous areas (approval pending)
- **Ultra-Low Power Circuitry** – A 3.6 V Lithium battery provides for **5 years continuous service**. Programmable auto shut-off included
- **Precise Measurements** – 0.25% of FS. Pressure ranges from 0-50 to 10,000 psig – all ranges can withstand full vacuum
- **Temperature Compensation** – accuracy not de-rated over the temperature range 32-131 deg F
- **Analog/Digital Display** – 4 digit (0.75" high) LCD with 25-segment bar graph
- **Field Ready** – 4 ½" ABS case w/ safety blow-out. Fitting is adjustable from bottom to back in the field
- **316 SS Sensors** - designed for aggressive media. 2x overpressure
- **Damping** – stabilize readings with adjustable LCD filter
- **Hi/Lo** – Capture/display pressure extremes
- **Options** – Chemical seals and SS case

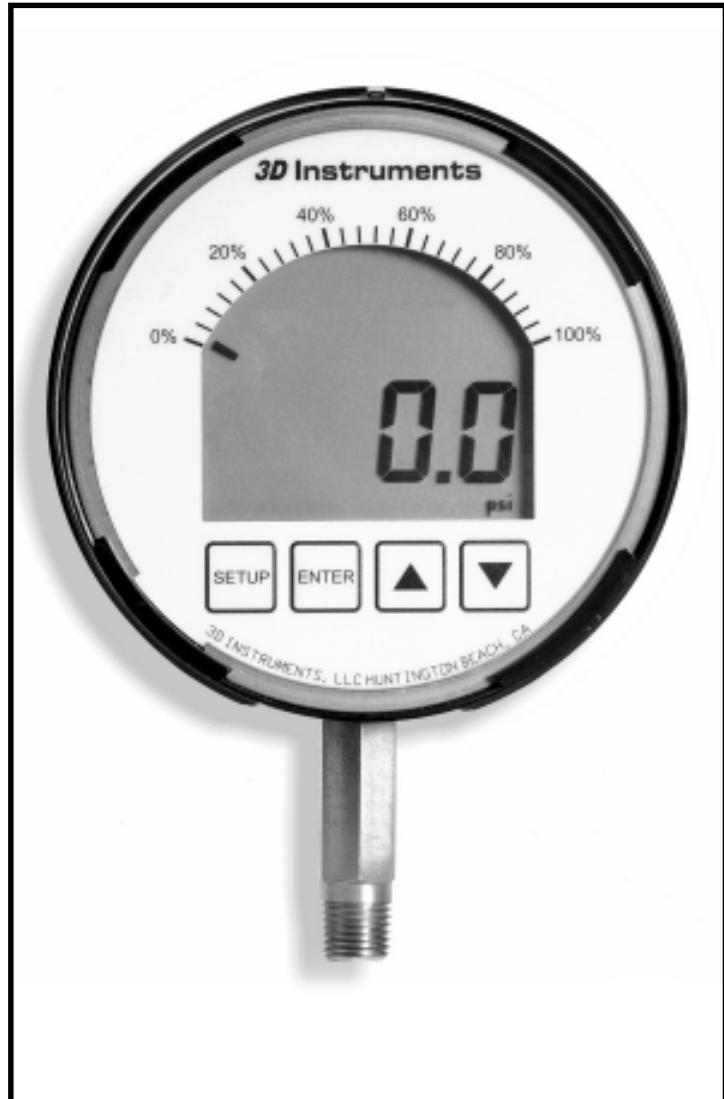

Product Description

The DPG-6600 from 3D Instruments, a 4 ½" battery powered digital pressure gauge, incorporates outstanding pressure sensors from 0-50 to 0-10000 psig to provide accuracy of 0.25% of full scale. Special temperature compensation circuitry maintains this accuracy fixed over a temperature range of 32° to 131° F!! Wetted components are 316SS for compatibility with many aggressive process medias.

A special 4-digit LCD with oversized 0.75" digits coupled with a 25-segment analog bar graph combine to provide unsurpassed readability. Other features include: multiple engr. units, display dampening, low battery indication and display of Hi/Lo values.

The DPG-6600 is housed in an ABS case outfitted with an ingenious field adjustable process connection fitting/flange arrangement. All functions including: Power, Zero, Engr. Units and Hi/Lo are selectable via a Polyester keypad for reliable operation in poor weather conditions. To reduce maintenance, a high energy lithium cell and low power circuitry offer an incredible 5 year battery life! An auto shut-off feature allows adjustment from 0-720 minutes.

The combination of sophisticated precision pressure measurement technology, robust design and a wide array of pressure ranges makes the DPG-6600 family of digital pressure gauges the ideal choice to tackle your demanding pressure monitoring or test/calibration applications.

DPG-6600 Digital Pressure Gauge

General Specifications

Accuracy:

0.25% of full scale for positive pressure. (Full scale = positive span). Vacuum accuracy 50, 100 PSI = +/- .3 PSI, 200 to 1000 PSI = +/- 1 PSI, 2500 and higher up not specified. Includes all variations due to non-linearity, hysteresis, repeatability and temperature over the Compensated Range

Range (PSI)	Resolution	Over Pressure(PSI)
-14.7 - 50	0.1	100
-14.7 - 100	0.1	200
-14.7 - 200	0.1	400
-15 - 500	1	1000
-15 - 1000	1	2000
-15 - 2500	1	5000
-15 - 5000	1	10000
-15 - 10000	1	20000

Environmental

Compensated range: 32 to 131°F (0 to 55°C)
 Operating range: -40 to 185°F (-40 to 85°C)
 Storage range: -40 to 185°F (-40 to 85°C)

Sensors:

Media-isolated. Suitable for gases and liquids compatible with 316SS. Burst Pressure: 5X or 25,000 psi, whichever is less.

Battery:

1- 3.6 volt lithium "C" size cell
 5 year of continuous operation

LCD:

4 digit; 25-segment bar graph

Case/Flange material:

ABS plastic or 300 series SS; neoprene blow-out plug

Process Connection:

¼" NPTM - 316SS

Keypad:

4 sealed membrane switches - Polyester

Dimensions: (Bottom connect)

4.78"(w) x 2.50"(D) x 6.58"(L)

Weight:

514g (18 oz) including battery

Features

Engineering Units:

Psig, inH₂O, InHg, mmH₂O, mmHg, Bar, mbar, Kg/cm². Custom units can be programmed in. **Note: Not all engr. units available on all pressure ranges.**

Damping:

Adjustable LCD filter – approximately 1-96 seconds

Screen Update Rate:

1x per second

Hi/Lo:

Capture/query stored Hi/Lo pressure values

Tare:

0 to 20% FS zero offset capability

Power Management:

Auto shutoff adjustable from 0-720 minutes

Low Battery Indication:

Two indicators: 1st alternating reading of pressure and L.Bat, 2nd: a continuous reading of L.Bat

Ordering Information

Example: 4 ½" DPG-6600 with black ABS case

0-5000 psi sensor, bottom ¼" NPT male fitting: 66544-35B71

① ② ③ ④ ⑤
66544 - XX B XX XXX

① **Product Description:** Battery Powered 4 ½" DPG-6600

② **Pressure Range Codes:**

18: -14.7 - 50 psig 25: -14.7 - 200 psig 29: -15 - 1000 psig 35: -15 - 5000 psig
 23: -14.7 - 100 psig 27: -15 - 500 psig 47: -15 - 2500 psig 38: -15 - 10000 psig

③ **Process Connection:** ¼" NPT male

④ **Case Type/Process Connection:** (mounting flange is supplied standard with ABS case)

71: black ABS case, fitting bottom, flange detached
 15: SS case, fitting bottom, flange front 25: SS case, fitting back, flange front
 35: SS case, fitting bottom, flange back 45: SS case, fitting back, flange back
 55: SS case, fitting bottom, flange none 65: SS case, fitting back, flange none

⑤ **Option Codes:** (leave blank if no options are required)

PNO: DPG-Cal Kit #1 – includes a DPG-6600, Model 8110-300:0-300 psi Pneumatic Handpump, Hose Kit and Series-200 ABS waterproof carrying case

PRO: DPG-Cal Kit #2 – includes a DPG-6600, Model 8111-300: Vacuum/0-300 psi Duplex Handpump, Hose Kit and Series-200 ABS waterproof carrying case

PUO: DPG-Cal Kit #3 – includes a DPG-6600, Model 8112-3000: 0-3000 psi Hydraulic Handpump, Hose Kit and Series-200 ABS waterproof carrying case

GCO: NIST traceable Calibration Certificate with data. A NIST traceable Certificate of Conformance is supplied with each unit at the time of shipment.



3D Instruments, LLC

15542 Chemical Lane, Huntington Beach, CA 92649 USA

Phone: (714) 894-5351 Fax: (714) 895-4309

Internet: www.digitalpressuregauge.com E-mail: info@3dinstruments.com