



06353E00

## Watertight Switch Series TEF 1239

- For use in
  - Marine application
  - Safe area
- For use in harsh environments and adverse weather conditions
- Solid brass execution
- Easy mounting
- Switch with extremely low lifecycle cost

STAHL

# Safe Area

**Selection Table**

Version	Description	Ordering code	Weight kg
Watertight switch Series TEF 1239	2 pole, 250 V AC	<b>TEF1239200</b>	0,800


**Technical Data**

Certificates	Ⓝ GR. 1.112.6 or 14.1.112.6
Enclosure material	Cast brass
Rated voltage	250 V AC
Rated current	16 A
Contact	2 pole
Cable entries	2 x Pg 16 cable glands 2 x Pg 16 stopping plugs
Degree of protection	IP 56

**Accessories and Spare Parts**

Designation	Description	Ordering code	Weight kg
Cable gland	Pg 16	<b>510100010070</b>	0,050
Stopping plug	Pg 16	<b>510100010080</b>	0,010

**Dimension drawings** (all dimensions in mm) - subject to alterations

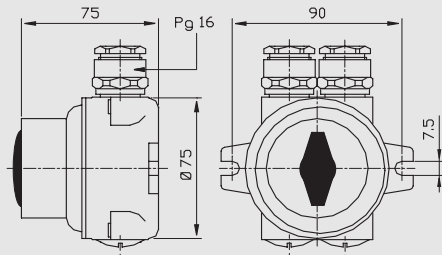

06338E00

We reserve the right to make alterations to the technical data, weights, dimensions, designs and products available without notice. The illustrations cannot be considered binding.