



06347E00

## Compact Light Fittings Series TEF 2367

- Rugged and low profile
- Designed for use in outdoor areas where the going gets tough. Deck lighting, Harbour areas and Buildings
- Proven ingress protection
- Long Lamp life using compact fluorescent tubes, 8000 hours
- Simple to install and maintain
- Short ignition time at low temperatures
- Resistant to vibrations

STAHL

## Zone 2, Safe Area

**Selection Table**

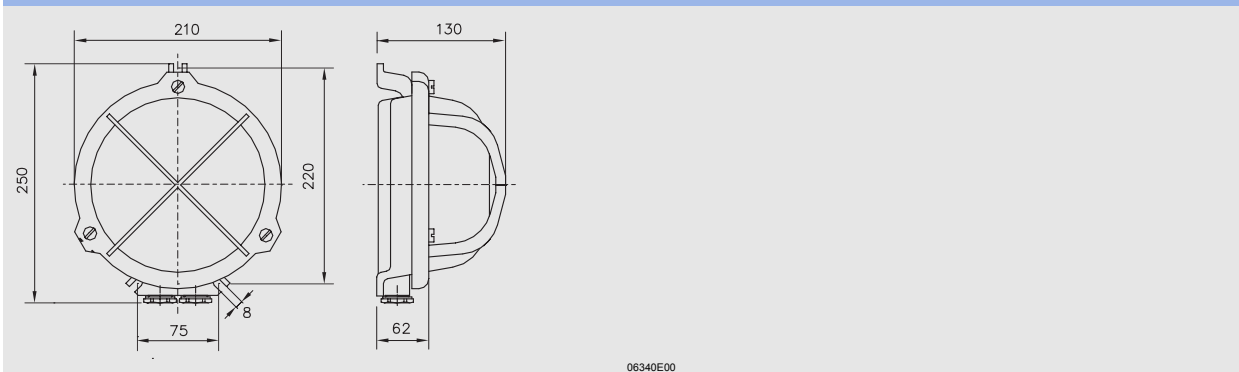
Version	Ordering code	Weight kg
Compact Light Fittings Series TEF 2367	<b>TEF2367000</b>	5,400

**Technical Data**

Rated voltage	230 V / 240 V AC - 50 / 60 Hz 110 V / 120 V AC - 50 / 60 Hz
Lamp	Compact fluorescent tube PLS 2 x 7 W
Lampholder	G 23
Power consumption	20 W
Material	
Housing	Cast copper alloy
Replacement glass	glass
Colour of glass	clear
Degree of protection	IP67
Cable glands	2 x M20 cable glands E204 / 2B for cable diam.: 9.1 - 14.3 mm
Ambient temperature	- 20 °C ... + 40 °C

**Accessories and Spare Parts**

Designation	Description	Ordering code	Weight kg
Glass	clear	<b>520100010050</b>	1,030
Fluorescent tube	7 W	<b>520100010100</b>	0,030

**Dimension drawings** (all dimensions in mm ) - subject to alterations

We reserve the right to make alterations to the technical data, weights, dimensions, designs and products available without notice. The illustrations cannot be considered binding.

