

750P Submersible Level Transmitter

Intrinsically Safe for Sewage Applications



FEATURES

- Solid state semiconductor sensor for accuracy and reliability
- Rugged 316 stainless steel housing with excellent environmental protection
- HASTELLOY C diaphragm
- Easy to install and use
- 2 wire 4 to 20 mA output
- Vented to the atmosphere through the surface end of the cable
- Reverse polarity and surge protected
- Lightning protectors available
- Nonclogging, flush diaphragm

APPLICATIONS

Water / wastewater treatment
Lift stations
Slurry / sludge
Pump control
Level control

DESCRIPTION

The Model 750P Submersible Level Transmitter, with its flush diaphragm, is specially designed to provide the convenience of direct submergence in many types of liquid, especially wastewater, for quick, accurate and reliable level measurement. The simple design and rugged construction of this solid state instrument provide long lasting service with virtually no maintenance.

The Model 750P Transmitter indicates the level of liquid by continuously measuring hydrostatic pressure via its sensing element, an ion implanted silicon semiconductor chip with integral Wheatstone Bridge circuit. Once the sensor measures the pressure, the data is transmitted by a 4 to 20 mA output signal. This design provides for excellent linearity and repeatability, low hysteresis and long term stability.

The Model 750P is easy to install, too. Simply lower the transmitter into a tank. A special protective flange protects the probe's HASTELLOY C diaphragm. All the electronics are mounted in a submersible 316 stainless steel housing. A special cable support bracket is also available. This gives extra stability to the transmitter when used with longer lengths of cable or when used in an agitated liquid.

The transmitter is available calibrated for any span needed, from 0 to 3 psi or 0 to 0.2 bar (0 to 7 feet or 0 to 2.1 meters of water) to 0 to 300 psi or 0 to 20 bar (0 to 690 feet or 0 to 211 meters of water).

To complete your liquid level measurement and control system, use the AMETEK Model CDM Digital Meter/ Controller with the Model 750P Submersible Transmitter



Continuous Level Measurement

Model 750P Submersible Level Transmitter

Specifications

FEET OF WATER:

0/14, 0/35, 0/69, 0/138, 0/230, 0/345, 0/460,
0/690

METERS OF WATER:

0/4, 0/10, 0/21, 0/42, 0/70, 0/105, 0/140, 0/210

BAR: 0/0.4, 0/1, 0/2, 0/4, 0/7, 0/10, 0/14, 0/20

PSI: 0/6, 0/15, 0/30, 0/60, 0/100, 0/150, 0/200,
0/300

OUTPUT:

4 to 20 mA, 2 wire, current limited to 30 mA DC

POWER SUPPLY:

12 to 40 VDC with reverse polarity surge protection; Limited to 28 VDC for CSA I.S.

LOOP RESISTANCE:

1400 ohms maximum at 40 volts

TEMPERATURE RANGE*:

Ambient Operating: CSA intrinsically safe T3C =
-25 O F to 180 O F (-32 O C to 82 O C)

Storage: -40 O F to 180 O F (-40 O C to 82 O C)

** If submerged in a liquid that has frozen, damage will result.*

Limit high temperature to 140 O F (60 O C) for intrinsically safe operation.

OVERRANGE EFFECT:

+0.15% full scale at 200% of maximum range

OVERRANGE LIMIT:

200% of maximum range

ACCURACY:

+0.25% full scale, BFSL (including linearity, hysteresis and repeatability); +0.50% full scale (6 psi range only)

ZERO OFFSET:

+0.50% full scale set at 77 O F (25 O C)

SPAN:

+0.50% full scale set at 77 O F (25 O C)

TEMPERATURE EFFECTS:

Compensated: 23 O F to 130 O F (-5 O C to 55 O C); Maximum +1% URL output change for +25 O C temperature change within compensated range when calibrated at 25 O C

POWER SUPPLY EFFECT:

+0.005% full scale per volt

CONSTRUCTION:

Diaphragm: HASTELLOY C

Housing Type: 316 stainless steel

Nut/Washer Type: 316 stainless steel

Cable Grommet: Viton

Housing O Ring: Viton

Cable Jacket: Polyurethane

ELECTRICAL CONNECTION:

Attached 20 gauge polyurethane shielded cable.

Unspliced lengths available up to 5000 ft. (1662 m)

WEIGHT: 3 oz. (539 g)

APPROVALS:


Meets CSA requirements for intrinsically safe operation in hazardous locations as designated by Class I, Div 1, Groups A, B, C & D and Class II, Groups E, F & G. Temperature Code T3C (when used with approved barrier).

Continuous Level Measurement

Model 750P Submersible Level Transmitter

Model Numbering

750 - P - B - 0015 - N - H - S (100 Ft. of Cable)

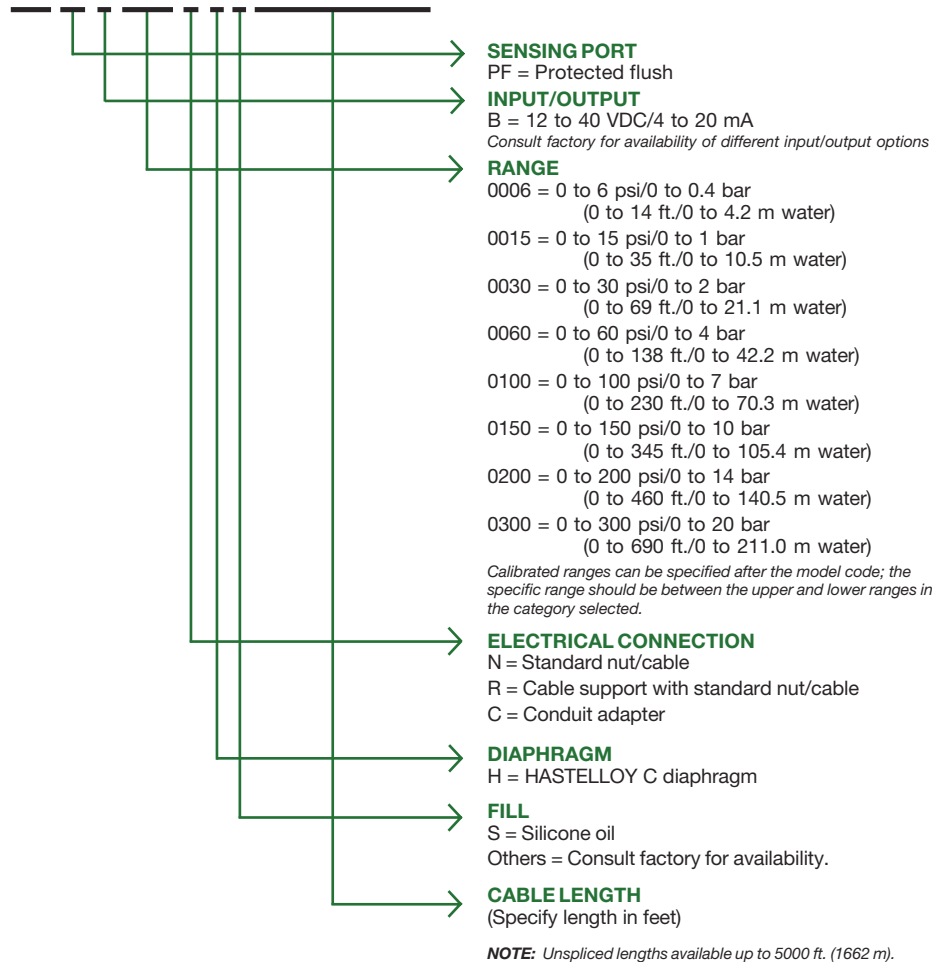

Example:


750-P-B-0015-N-H-S (100 Ft. of Cable)

Model 750P protected flush submersible transmitter, 12 to 40 VDC input, 4 to 20 mA output, to measure 15 psi, standard nut, cable electrical connection, HASTELLOY C diaphragm, silicone fill, 100 ft. of cable.

Continuous Level Measurement

Model 750P Submersible Level Transmitter

Dimensions

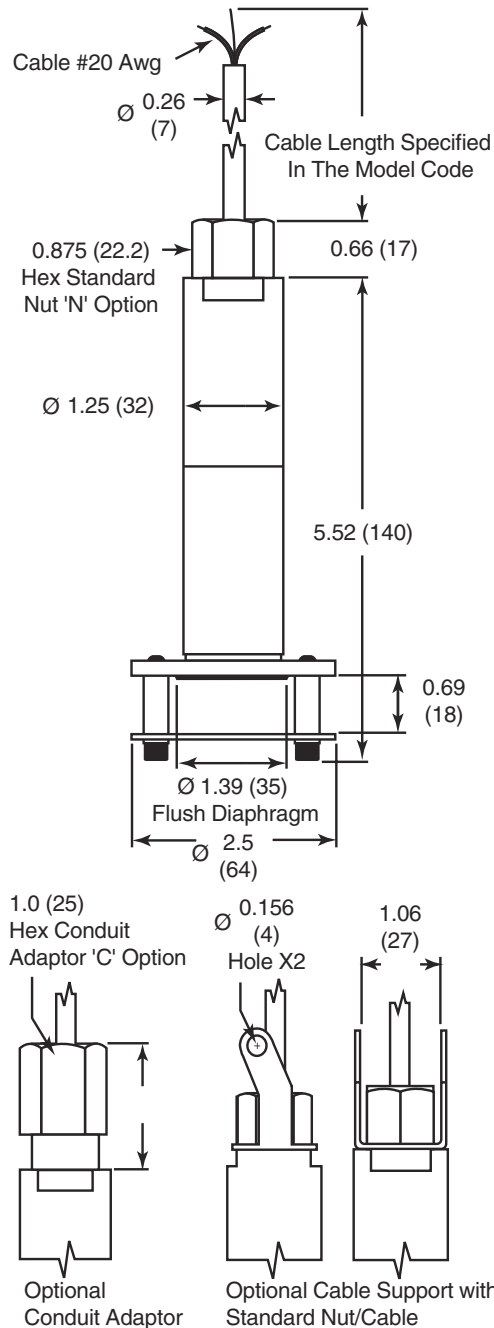

U.S.A. Sales: 800-553-9092 • 24-Hour Service: 800-527-6297 • International Support: 215-674-1234 • Fax: 215-674-2731

AMETEK®
DREXELBROOK

205 Keith Valley Road
Horsham PA 19044 U.S.A.
E-mail - drexelbrook.info@ametek.com
Web - www.drexelbrook.com

AMETEK Nihon Drexelbrook
2 Chome • 12-7 Minami Gyotoku
Ichikawa City • Chiba 27201 Japan
Phone: 81-473-56-6513
Fax: 81-473-56-6535
E-mail: nd@nihon-drexelbrook.co.jp

AMETEK Singapore Pte. Ltd.
10 Ang Mo Kio Street 65
#05-12 Techpoint • 569059 Singapore
Phone: 65-6484-2388
Fax: 65-6481-6588
E-mail: aspl@ametek.com.sg

AMETEK Precision Instruments Europe
Rudolf-Diesel-Strasse 16
D-40670 Meerbusch Germany
Phone: 49-2159-9136-0
Fax: 49-2159-9136-39
Web: www.ametek.de