

Features

- Large, backlit LCD display
- Internal temperature sensor and one external input which accepts thermocouple types J, K, T, E, R, S, B, N
- Front keypad w/lock feature
- High speed download
- Real-time operation
- Min./max. & average statistics
- Programmable start/stop time
- N.I.S.T traceable calibration
- User replaceable battery and external power
- Wall mountable

Applications

- HVAC applications
- Oven Profiling
- HACCP program implementation
- Process verification and validation
- Warehouse monitoring
- Museum and Laboratory monitoring
- Medical & pharmaceutical facility monitoring
- Environmental studies
- Food storage
- Live cargo transport
- Concrete Curing/Construction

The TCTemp2000 is a battery powered thermocouple temperature recorder with an LCD display. It has an internal temperature sensor and one external input for J, K, T, E, R, S, B, and N type thermocouples.




The 8-button keypad and large LCD provide convenient access to current data and recorder setup. Additionally, memory and battery levels, external power status, and sampling and recording status are shown on the LCD.

Available on-screen data includes: statistics (min, max, average); recording status (start, stop and recording rate); display options (units, text size); and calibration information (date calibrated, date for recalibration). Statistics can be cleared at any time during logging.

With 131,071 readings, the TCTemp2000 has one of the largest memory capacities of any similar data recorder on the market. The non-volatile memory will retain recorded data, even if AC and battery power are lost.

The TCTemp2000 runs on a 9V battery with a typical battery life of 1 year at a 1 min reading rate with the display off. With continuous LCD and no backlight usage, the average battery life is 30 days. For power savings, both the LCD and backlight have configurable auto-off options. Those wanting to keep the LCD display and backlight continuously active need only to connect the unit to an AC power supply, keeping the 9V battery connected as a back-up.

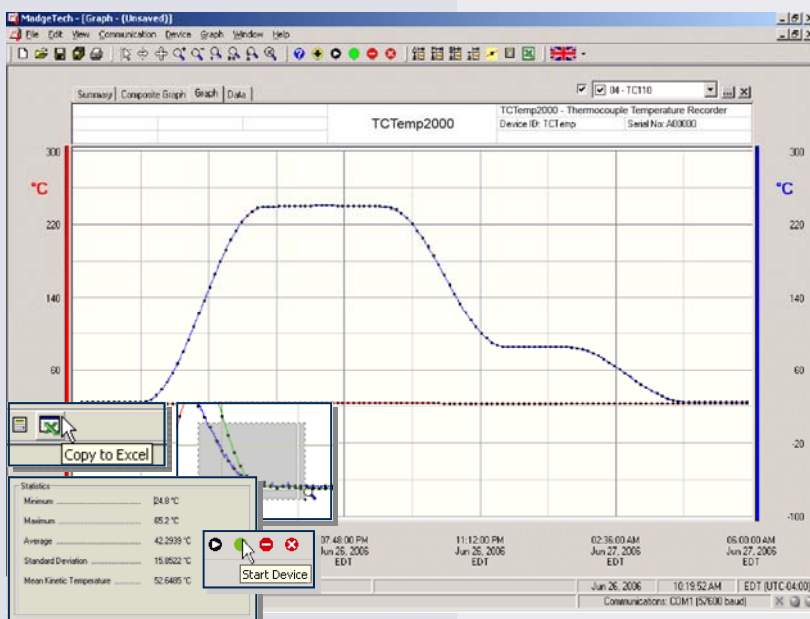

MadgeTech Data Recorder Software

displays temperature data in an easy to use graph.

The Windows®-based software package allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

Click [MadgeTech Software](#) for more information or to download the software.

TCTEMP2000 SPECIFICATIONS*

Internal Channel
Temperature Range: -20 to +60°C
Temperature Resolution: 0.1°C
Calibrated Accuracy: ±0.5°C (0 to +50°C)
Thermocouple Channel
Thermocouple Types: J, K, T, E, R, S, B, N
Thermocouple connection: Female subminiature (SMP), fixed screw terminal, or pluggable screw terminal
Cold Junction Compensation: Automatic, based on internal channel
Maximum Thermocouple Resistance: 1000Ω, <100Ω recommended
****Thermocouple Type:**

Range (°C)	Resolution	Accuracy
J	-210 to +760	0.1°C ±0.5°C
K	-260 to +1370	0.1°C ±0.5°C
T	-260 to +400	0.1°C ±0.5°C
E	-260 to +980	0.1°C ±0.5°C
R	-50 to +1760	0.5°C ±2.0°C
S	-50 to +1760	0.5°C ±2.0°C
B	+60 to +1820	0.5°C ±2.0°C
N	-260 to +1300	0.1°C ±0.5°C

DOT-MATRIX LCD

Dimensions: 2.5" x 1.375" (63mm x 35mm)
Text: Configurable channel text size
Indicators: Power, status, memory
Backlight: Configurable w/auto shut-off and contrast adjustment

SOFTWARE FEATURES

Multiple Graphs: Simultaneously analyze data from several units or deployments; easily switch to a single data series	Statistics: Automatically calculate averages, min, max, standard deviation, and mean kinetic temperature.
Real-Time Recording: Collect and display data in real-time while continuing to log	Export Data: Export data in a variety of common formats, or switch to Excel® with a single click
Graphical Cursor: One click displays readings by time, value, parameter or sample number	Calibration: Automatically calculate and store calibration parameters
Data Table: Instantly access tabular view for detailed dates, times, values, and annotations	Logger Configuration: Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
Scaling Options: Autoscale function fits data to the screen, or allows user to manually enter their own values	Communications: Automatically sets up communications port, or lets user select configuration
Formatting Options: Change colors, line styles, plotting options, show or hide channels quickly	Printing: Automatically print graphical or tabular data

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

ORDERING INFORMATION

Model	Description	Price (U.S.)
TCTemp2000	Thermocouple temperature recorder w/LCD Display	\$499.00
IFC200	Software, manual and USB interface cable	\$119.00
U9VL-J	Replacement battery for TCTemp2000	\$15.00
SVP -Secure	Protocols for validating the 21 CFR Part 11 ready, secure data logging system	\$600.00
SVP-Secure License	License for MadgeTech SVP-Secure Software (unlimited users, license per computer)	\$1000.00

ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	Pulse/Event/State
Humidity	Low Level Current
Pressure	Low Level Voltage
pH	RF Transmitters
Level	Intrinsically Safe
Shock	Spectral Vibration
LCD Display	

